


PASS-THROUGH DRAINAGE - TO BE REGULAR PERFORATIONS EVERY 4" APART

SYNTHETIC GRASS SPIKES

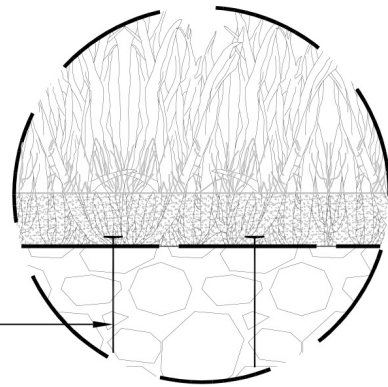

## ACTIVE PET & PLAY

INSTALLATION: STANDARD LANDSCAPE GRASS

GRASS TYPE: ACTIVE PET & PLAY COOL REFLECT

DESCRIPTION:

A DURABLE, MULTI-FUNCTIONAL RECREATIONAL/PET FRIENDLY GRASS WHICH EXHIBITS LOWER TEMPERATURES AND RAPID PERMEABILITY.

### SPECIFICATIONS:

YARN #1	HEAT RESISTANT MONOFILAMENT FIBER
COLOR	FIELD GREEN/LIME
TOTAL DENIER	APPROX. 10,800 (1800 X 6)
DESCRIPTION	PE FOR SUPERIOR WEAR RESIST.
THICKNESS / FORM	APPROX. 350 MICRON RHOMBUS FORM
YARN #2	PE FOR SUPERIOR WEAR RESIST.
COLOR	FIELD GREEN/TAN THATCH
TOTAL DENIER	APPROX. 8,100 (1,350 X 6)
DESCRIPTION	TEXTURIZED FOR LOW BULK
THICKNESS/FORM	APPROX. 150 MICRON REC., ROUND EDGE
TOTAL YARN FACE WT	50 OZ/SY
PRIMARY BACKING #1	STABILIZED DUAL LAYER POLYPROPELENE
PRIMARY BACKING WT	7 OZ/SY
SECONDARY BACKING	ENVIROFLOW
SECONDARY WT	10 OZ/SY
TOTAL PRODUCT	81.6 OZ/SY
COLORS AVAILABLE	CONTACT POLYTURF FOR OPTIONS

### TUFTING INFORMATION

PILE HEIGHT	1 5/8" TUFTED
STITCH RATE	AS REQUIRED
TUFTING GAUGE	3/8"
ROLL WIDTHS	15'
DRAINAGE PERFORATIONS	STANDARD

### INSTALLATION NOTES:

1. TURF MUST BE INSTALLED AND SEAMED WITH SURROUNDING ADJACENT PIECES RUNNING IN THE SAME DIRECTION. ALL SEAMS TO HAVE SEAMING GLUE & 6" WIDE SEAMING TAPE.
2. TO SECURE TURF AT BASE W/ 6" 60d FLAT HEAD GALV. NAILS 3-4" ON INT. FIELD. PERIMETER NAILER USE 1" TARPON SCRWs @ 9" O.C. ALONG PERIMETER.
3. RECOM'D MIN. INFILL 1/2" LB. COOL REFLECT NATURAL OR GREEN COATED SAND (OPT) AVAIL. IN 16 OR 20 MESH.
4. POWER BROOMING IS THE LAST STAGE OF TURF INSTALLATION.

### GENERAL NOTES:

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH THE SPECIFICATIONS LISTED BY POLYTURF AUTHORIZED INSTALLERS.
2. DRAWINGS ARE FOR REFERENCE ONLY, DRAWINGS ARE NOT TO SCALE.
3. FOR FURTHER PRODUCT/ INSTALLATION INFORMATION VISIT [WWW.POLYTURF.COM](http://WWW.POLYTURF.COM) [INFO@SUSTAINABLESURFACING.COM](mailto:INFO@SUSTAINABLESURFACING.COM) [WWW.SUSTAINABLESURFACING.COM](http://WWW.SUSTAINABLESURFACING.COM) CONTACT (877) 288-0045